


- Settable Output voltage: 12-24Vdc / 2.4-1.2A/h
- Sealed lead Acid Battery
- Integrated Self Resettable Overcurrent Protection

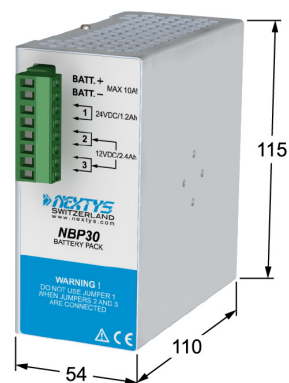

For reference only

## TECHNICAL DATA

	NBP30
<b>BATTERY PACK INFO</b>	
Voltage capacity	2 x Lead acid sealed batteries 12Vdc / 1.2Ah
Battery Size (W x H x D)	48.5 x 54.5 x 97.5 mm Max
Internal protection fuse	15A self resettable
Max Charging Current	12Vdc Configuration: <b>0.6A</b> 24Vdc Configuration: <b>0.3A</b>
Max Discharge Current	12Vdc Configuration: <b>5A</b> 24Vdc Configuration: <b>3A</b>
<b>CONFIGURATION</b>	
Voltage / Capacity	12Vdc / 2.4Ah
Settable by external jumper	24Vdc / 1.2Ah
<b>GENERAL DATA</b>	
Operating temperature	- 20°C...+ 40°C
Protection degree	IP20 acc. to EN60529
Connection terminals	2.5mm <sup>2</sup> , screw type pluggable (24...12AWG)
Case material	Aluminum
Approx. Weight	1.200kg (2 batteries included)
Size (W x H x D)	54.0 x 115.0 x 110.0mm
Mounting rail	IEC 60715/H15/TH35-7.5(-15)
Rail mounting information	Vertical