

100W Single Output Switching Power Supply

HLG-100H series

△ ⊗ **CB** (€

🖉 intertrafo



8

Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 93%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
 OCP point adjustable through
- OCP point adjustable through output cable or internal potentiometer
 IP67 / IP65 design for indoor or outdoor installations
- IF07 / IF05 design for
 Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations5 years warranty (Note.9)

👿 SELV IP65 IP67 🕞 🔊 🖳 🖉 📼



HLG-100H-20 A Blank : IP67 rated. Cable for I/O connection.

110/

<u>M</u>

F

A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.


 $B: IP67\ rated.\ Constant\ current\ level\ adjustable\ through\ output\ cable\ with\ 1 \sim 10Vdc\ or\ 10V\ PWM\ signal\ or\ resistance.$

D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.


SPECIFICATION

MODEL		HLG-100H-20	HLG-100H-24	HLG-100H-30	HLG-100H-36	HLG-100H-42	HLG-100H-48	HLG-100H-54					
	DC VOLTAGE	20V	24V	30V	36V	42V	48V	54V					
OUTPUT	RATED CURRENT	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A					
	RATED POWER	96W	96W	96W	95.4W	95.76W	96W	95.58W					
	RIPPLE & NOISE (max.) Note.2		150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p					
	VOLTAGE ADJ, RANGE Note.5		22~27V	27 ~ 33V	33~40V	38 ~ 46V	43~53V	49~58V					
			y internal potention										
	CURRENT ADJ. RANGE	3~4.8A	2.5 ~ 4A	2 ~ 3.2A	1.65 ~ 2.65A	1.4 ~ 2.28A	1.25 ~ 2A	1.1~1.77A					
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%					
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	SETUP, RISE TIME Note.7	2500ms, 50ms at full load 230VAC / 115VAC ; B type 2500ms, 200ms at 95% load 230VAC / 115VAC											
	HOLD UP TIME (Typ.)	16ms at full load 230VAC /115VAC											
	VOLTAGE RANGE Note.4	90 ~ 305VAC 127 ~ 431VDC											
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
INPUT	EFFICIENCY (Typ.)	93%	93%	93%	93%	93%	93%	93%					
	AC CURRENT (Typ.)	1.2A / 115VAC 0.55A / 230VAC 0.5A / 277VAC											
	INRUSH CURRENT (Typ.)	COLD START 60A(twidth=415µs measured at 50% Ipeak) at 230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
	OVER CURRENT 95 ~ 106%												
	OVER ODIALENT	Protection type : Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION	OVER VOLTAGE	23 ~ 27 V	28~34V	34 ~ 38V	41~46V	47 ~ 53V	54 ~ 63V	59 ~ 65V					
	OVER VOLIAGE	Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery											
	OVER TEMPERATURE	100°C ±10°C (RTH2) Protection type : Shut down o/p voltage, recovers automatically after temperature goes down											
			omatically after ter	mperature goes do	own								
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)											
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
	SAFETY STANDARDS Note.6	UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved											
		design refer to UL60950-1, TUV EN60950-1											
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVA	C I/P-FG:2KVA	C O/P-FG:0.5K\	/AC								
EMC	ISOLATION RESISTANCE		D/P-FG:100M Ohr										
	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧60% load) ; EN61000-3-3											
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A											
	MTBF	192.2K hrs min. MIL-HDBK-217F (25°C)											
OTHERS	DIMENSION	220*68*38.8mm (L*W*H)											
	PACKING	1.12Kg; 12pcs/14.4Kg/0.8CUFT											
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25[°]C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12[°] twisted pair-wire terminated with a 0.1 uf & 47 uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Derating may be needed under low input voltages. Please check the static characteristics for more details. A type only. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. Refer to warranty statement. 												



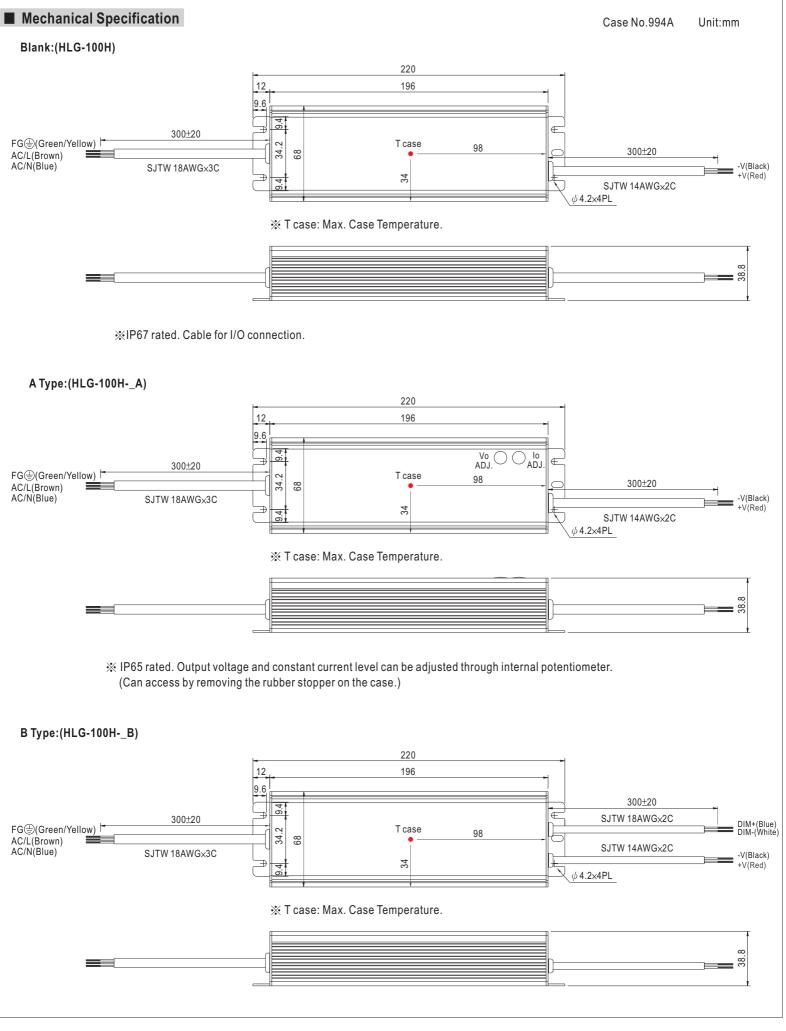




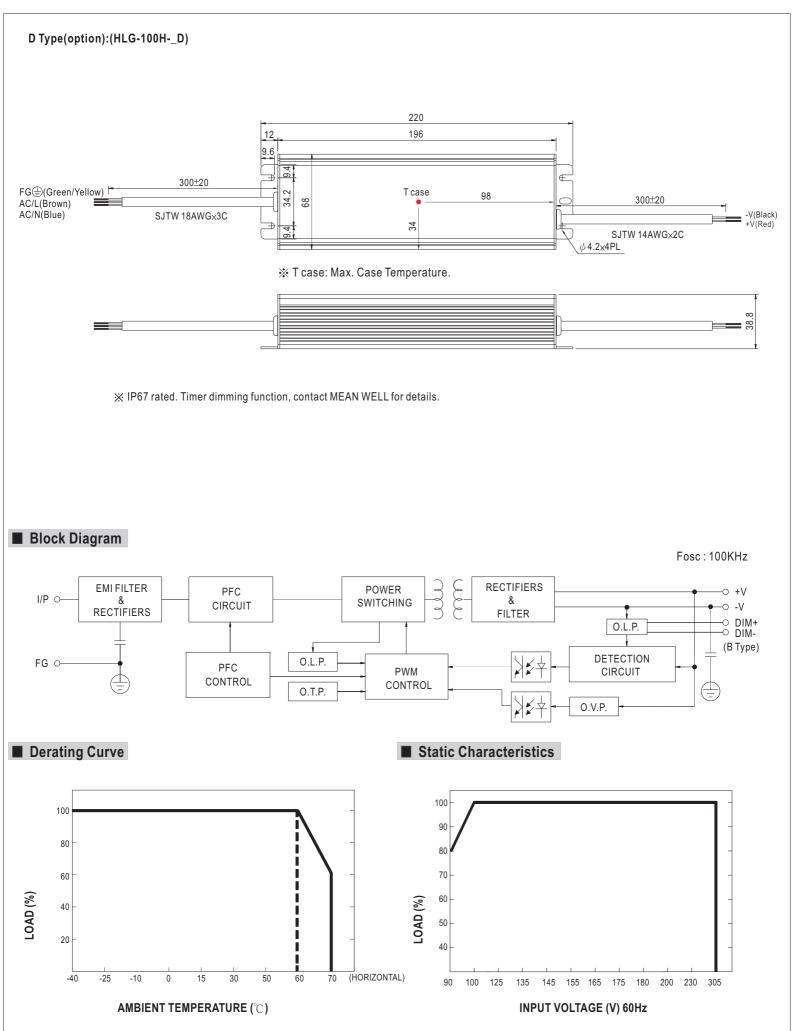




Power Factor Characteristic

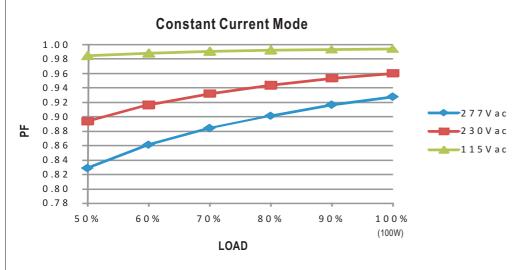

EFFICIENCY vs LOAD (48V Model)


HLG-100H series possess superior working efficiency that up to 93% can be reached in field applications.

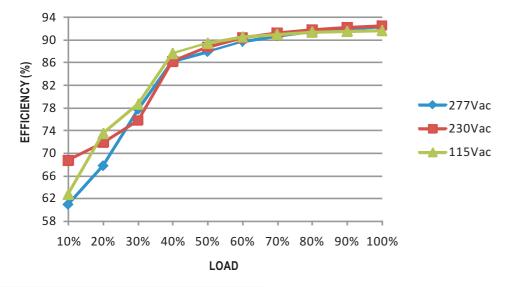

DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve



DIMMING OPERATION (for B-type only)



※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

Resistance value	10K Ω	20Κ Ω	30Κ Ω	40Κ Ω	50Κ Ω	60K Ω	70Κ Ω	80K Ω	90Κ Ω	100K Ω	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%
× 1 ~ 10V dimming function for output current adjustment (Typical)											
Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

%Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

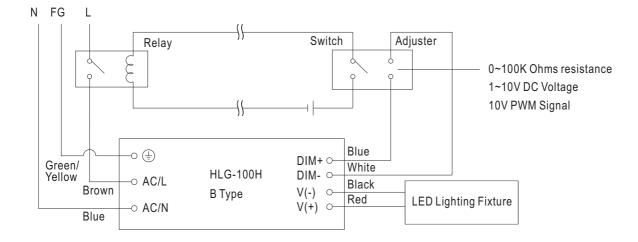

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



WATERPROOF CONNECTION

 \odot Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-100H to operate in dry/wet/damp or outdoor environment.

